

data safe®

16HX-FT

Uninterruptible Power Supply (UPS) Applications

Battery Performance Specifications

16HX Front Terminal Batteries



Visit us at www.enersys.com

EnerSys®

Power/Full Solutions

RESERVE
POWER

AM-HXFT-PS AA September 2018

Features and Benefits

- Smaller footprint per kilowatt than top terminated 12V batteries – more than 20% space savings for a full 15 minute run time for 750kVA UPS systems
- Eliminates wasted headspace found in typical 12V top terminated designs
- Complete front access simplifies installation
- Easy terminal access simplifies maintenance – no costly slide out trays required
- Design features and proven Valve Regulated Lead Acid (VRLA) manufacturing technology helps to improve reliability
- 925 WPC design reduces number of parallel strings required
- Up to 50% fewer connections means less maintenance
- Scales easily to large capacity UPS systems
- 100% initial battery capacity

Construction


- Insulating covers included with voltmeter probe access to enhance safety and simplify maintenance routines
- Integrated handle support doubles as an automatic spacer between units to enhance airflow and thermal management
- Self-resealing, flame-arresting vents and low pressure non-return valve prevent ingress of atmospheric oxygen
- Nord-Lock® washer provides a secure front terminal M8 connection over the life of the battery.
- Solid tin-plated copper busbars reduce connection resistance to enhance power delivery from the battery system
- Dual-tab washer enables quick connection to battery monitoring systems
- Polypropylene strap handle simplifies installation, removal and replacement

Standards

- UL Listed 1989 - UL File MH12544
- Manufactured to EnerSys® standards in ISO 9001 registered production facilities worldwide
- Approved for shipping as non-hazardous, non-spillable per IARA Special Provision A67 and 49CFR
- Flame retardant case and cover to meet UL-94

General Specifications

Model	Watts/Cell			Nominal Dimension						Unpacked	
	Number of Cells	Nominal Voltage (V)	15 min rate to 1.67 @ 77°F (25°C)	Length		Width		Height		lbs	kg
				in	mm	in	mm	in	mm		
16HX550F-FR	8	16	550	27.2	692	4.6	117	12.3	313	151	68.5
16HX800F-FR	8	16	800	27.2	692	7.0	177	12.3	313	232	105.2
16HX925F-FR	8	16	925	27.2	692	7.0	177	12.3	313	248	112.5

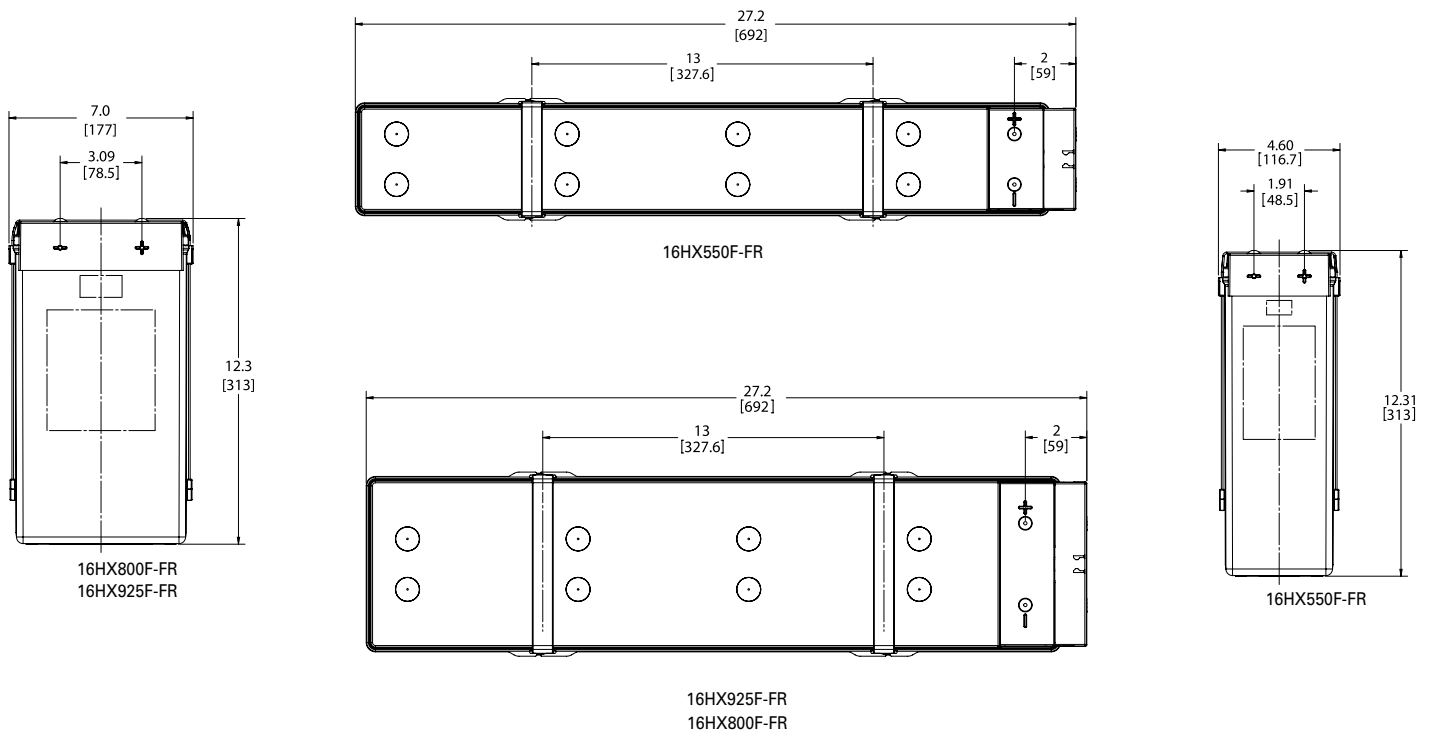

Battery Performance Specifications

Constant Power

16HX550F-FR Constant Power Discharge (Watts per cell at 77°F (25°C))

End Volts	Standby Time (Minutes)																						
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	25	30	45	60	90	120	240
1.60	927	873	825	780	738	700	666	635	607	581	556	534	513	491	472	453	382	332	242	191	136	106	58
1.63	911	860	813	769	730	694	661	631	604	579	556	534	513	491	472	453	382	332	242	191	136	106	58
1.65	898	849	802	760	723	688	656	627	601	576	554	532	512	491	472	453	382	332	242	191	136	106	58
1.67	884	836	790	750	713	680	650	622	596	572	550	529	508	488	469	452	382	332	242	191	136	106	58
1.70	859	811	769	731	697	665	637	611	587	564	543	521	500	481	463	446	380	332	242	191	136	106	58
1.75	802	762	725	691	660	632	606	582	561	539	518	498	479	462	445	430	370	324	239	190	136	106	58

16HX800F-FR Constant Power Discharge (Watts per cell at 77°F (25°C))

End Volts	Standby Time (Minutes)																						
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	25	30	45	60	90	120	240
1.60	1197	1197	1197	1143	1085	1032	984	939	899	862	827	796	767	740	715	691	590	516	378	301	216	170	94
1.63	1197	1197	1168	1117	1063	1013	967	925	887	851	818	787	759	733	709	686	590	516	378	301	216	170	94
1.65	1197	1197	1154	1097	1046	998	954	914	877	842	810	780	753	727	703	681	588	516	378	301	216	170	94
1.67	1197	1189	1130	1075	1026	981	939	900	865	831	800	772	745	720	697	675	584	515	378	301	216	170	94
1.70	1197	1146	1089	1039	993	951	912	876	843	812	783	756	730	707	684	663	576	508	378	301	216	170	94
1.75	1114	1060	1012	967	927	889	855	824	794	767	742	718	696	675	655	636	556	493	370	297	216	170	94

16HX925F-FR Constant Power Discharge (Watts per cell at 77°F (25°C))

End Volts	Standby Time (Minutes)																						
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	25	30	45	60	90	120	240
1.60	1310	1310	1310	1279	1217	1159	1103	1054	1011	970	931	896	863	827	795	765	650	569	417	332	238	137	102
1.63	1310	1310	1310	1265	1205	1151	1100	1052	1008	968	931	896	863	827	795	765	650	569	417	332	238	137	102
1.65	1310	1310	1310	1252	1195	1143	1093	1048	1005	966	929	894	860	826	795	765	650	569	417	332	238	137	102
1.67	1310	1310	1297	1237	1183	1132	1084	1040	999	961	925	891	856	822	790	762	650	569	417	332	238	137	102
1.70	1310	1310	1266	1210	1158	1109	1064	1023	984	947	913	878	842	810	780	752	644	567	417	332	238	137	102
1.75	1310	1256	1201	1149	1101	1058	1017	980	944	909	871	837	805	775	747	723	625	551	410	329	238	137	102

Constant Current

16HX550F-FR Constant Current Discharge (Amperes at 77°F (25°C))

End Volts	Standby Time (Minutes)												Standby Time (Hours)													
	1	5	10	15	20	25	30	35	40	45	50	55	1	1.5	2	2.5	3	4	5	6	7	8	9	10	12	24
1.60	690	566	410	314	247	206	178	157	141	128	117	107	100	70.5	54.7	44.9	38.2	29.6	24.2	20.5	17.8	15.7	14.0	12.7	10.7	5.40
1.63	690	548	403	314	247	206	178	157	141	128	117	107	100	70.5	54.7	44.9	38.2	29.6	24.2	20.5	17.8	15.7	14.0	12.7	10.7	5.40
1.65	690	535	398	312	247	206	178	157	141	128	117	107	100	70.5	54.7	44.9	38.2	29.6	24.2	20.5	17.8	15.7	14.0	12.7	10.7	5.40
1.67	690	521	391	309	247	206	178	157	141	128	117	107	100	70.5	54.7	44.9	38.2	29.6	24.2	20.5	17.8	15.7	14.0	12.7	10.7	5.40
1.69	664	506	384	304	245	206	178	157	141	128	117	107	100	70.5	54.7	44.9	38.2	29.6	24.2	20.5	17.8	15.7	14.0	12.7	10.7	5.40
1.71	635	490	375	299	242	205	178	157	141	128	117	107	100	70.5	54.7	44.9	38.2	29.6	24.2	20.5	17.8	15.7	14.0	12.7	10.7	5.40
1.73	603	473	364	292	238	202	176	156	141	128	117	107	100	70.5	54.7	44.9	38.2	29.6	24.2	20.5	17.8	15.7	14.0	12.7	10.7	5.40
1.75	570	453	353	284	233	199	173	154	139	127	116	107	100	70.5	54.7	44.9	38.2	29.6	24.2	20.5	17.8	15.7	14.0	12.7	10.7	5.40
1.80	486	405	321	258	216	187	164	147	133	121	111	103	95.7	68.6	53.7	44.3	37.8	29.5	24.1	20.5	17.8	15.7	14.0	12.7	10.7	5.40
1.85	393	350	278	227	193	168	149	134	121	111	103	95.3	89.1	64.3	50.5	41.7	35.7	27.9	22.8	19.4	16.8	14.8	13.3	12.1	10.1	5.19

16HX800F-FR Constant Current Discharge (Amperes at 77°F (25°C))

End Volts	Standby Time (Minutes)												Standby Time (Hours)													
	1	5	10	15	20	25	30	35	40	45	50	55	1	1.5	2	2.5	3	4	5	6	7	8	9	10	12	24
1.60	846	788	623	478	387	325	281	248	222	202	185	171	159	113	87.9	72.4	61.8	47.8	39.2	33.3	29.0	25.7	23.1	21.0	17.8	9.28
1.63	846	777	601	469	387	325	281	248	222	202	185	171	159	113	87.9	72.4	61.8	47.8	39.2	33.3	29.0	25.7	23.1	21.0	17.8	9.28
1.65	839	769	584	462	382	325	281	248	222	202	185	171	159	113	87.9	72.4	61.8	47.8	39.2	33.3	29.0	25.7	23.1	21.0	17.8	9.28
1.67	828	751	568	454	377	322	281	248	222	202	185	171	159	113	87.9	72.4	61.8	47.8	39.2	33.3	29.0	25.7	23.1	21.0	17.8	9.28
1.69	813	729	552	454	371	318	279	248	222	202	185	171	159	113	87.9	72.4	61.8	47.8	39.2	33.3	29.0	25.7	23.1	21.0	17.8	9.28
1.71	799	703	536	435	365	314	275	245	222	202	185	171	159	113	87.9	72.4	61.8	47.8	39.2	33.3	29.0	25.7	23.1	21.0	17.8	9.28
1.73	785	673	518	424	357	308	271	242	219	200	184	171	159	113	87.9	72.4	61.8	47.8	39.2	33.3	29.0	25.7	23.1	21.0	17.8	9.28
1.75	771	640	498	411	349	302	266	238	215	197	182	169	157	113	87.9	72.4	61.8	47.8	39.2	33.3	29.0	25.7	23.1	21.0	17.8	9.28
1.80	641	553	447	373	320	281	249	224	204	187	173	161	150	109	85.5	70.9	60.8	47.2	38.8	33.1	28.8	25.6	23.1	21.0	17.8	9.28
1.85	505	468	388	328	284	250	223	203	185	171	158	148	139	101	80.2	66.7	57.1	44.5	36.7	31.3	27.3	24.3	21.9	19.9	16.9	8.93

16HX925F-FR Constant Current Discharge (Amperes at 77°F (25°C))

End Volts	Standby Time (Minutes)												Standby Time (Hours)													
	1	5	10	15	20	25	30	35	40	45	50	55	1	1.5	2	2.5	3	4	5	6	7	8	9	10	12	24
1.60	844	843	679	528	420	354	308	272	245	222	204	188	175	124	96.8	79.6	67.7	52.4	42.7	36.1	31.3	27.6	24.7	22.3	18.8	9.58
1.63	844	843	671	528	420	354	308	272	245	222	204	188	175	124	96.8	79.6	67.7	52.4	42.7	36.1	31.3	27.6	24.7	22.3	18.8	9.58
1.65	844	843	663	525	420	354	308	272	245	222	204	188	175	124	96.8	79.6	67.7	52.4	42.7	36.1	31.3	27.6	24.7	22.3	18.8	9.58
1.67	844	843	652	520	419	354	308	272	245	222	204	188	175	124	96.8	79.6	67.7	52.4	42.7	36.1	31.3	27.6	24.7	22.3	18.8	9.58
1.69	844	824	640	513	414	353	308	272	245	222	204	188	175	124	96.8	79.6	67.7	52.4	42.7	36.1	31.3	27.6	24.7	22.3	18.8	9.58
1.71	844	798	626	503	409	349	306	272	245	222	204	188	175	124	96.8	79.6	67.7	52.4	42.7	36.1	31.3	27.6	24.7	22.3	18.8	9.58
1.73	844	772	610	491	402	344	301	272	242	221	203	188	175	124	96.8	79.6	67.7	52.4	42.7	36.1	31.3	27.6	24.7	22.3	18.8	9.58
1.75	844	745	592	477	393	337	296	264	239	218	201	186	174	124	96.8	79.6	67.7	52.4	42.7	36.1	31.3	27.6	24.7	22.3	18.8	9.58
1.80	808	671	541	434	365	315	278	249	226	207	191	178	166	120	94.2	77.9	66.6	51.8	42.4	35.9	31.2	27.5	24.6	22.3	18.8	9.58
1.85	653	585	467	382	325	284	252	227	206	190	175	164	153	111	88.1	73.1	62.7	48.9	40.1	34.0	29.6	26.1	23.4	21.2	17.9	9.17

Rates subject to change without notice.

