




an EnerSys® company

AlphaGateway™ SMG-HP

HFC Power | DOCSIS® 3.1 Backhaul | 2-Port PoE+ Delivery

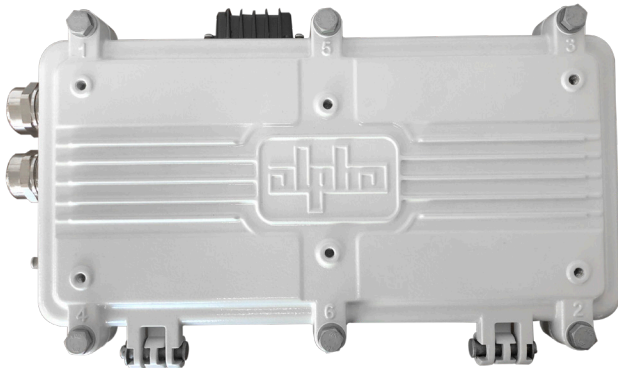

- Industrial hardened, CableLabs® certified DOCSIS® 3.1 cable modem
- IEEE802.3 af/at (PoE+) delivery (2 ports)
- GPS-compatible Global Navigation Satellite System (GNSS) receiver
- Remotely manage and control power on each port
- Layer 3 routing (NAT/PAT, DNS, Static IP)
- CableLabs Business Services over DOCSIS (BSoD)
- Third-party device integration and customizable lid solutions
- UL50E, IEC 60529, IP67, FCC Class B (FCC CFR Part 15 Class B), CISPR 24, CISPR 35, RoHS Directive 2011/65/EU compliant

Forward compatible, the AlphaGateway™ SMG-HP is purpose-built to provide our customers with a flexible and scalable enablement platform creating revenue-generating services today, and for what's next.

The small form factor and flexible interface architecture enables multiple applications and deployment options. As with all AlphaGateway devices, the SMG-HP is constructed with industrial temperature-hardened materials, including an Alpha®-designed DOCSIS® 3.1 modem. The AlphaGateway SMG-HP takes all that Alpha has learned in developing the award winning (BTR Diamond) AlphaGateway SMG and AlphaGateway BSC, and adds the value proposition of "thin to win" —today and tomorrow.

AlphaGateway™ SMG-HP Specifications

Design				
Model:	AG100D-PoE+			
MTBF:	>438,000 hours at ambient, >100,000 hours at the maximum operating ambient temperature			
Outdoor Hardened:	Component-level designed for the most rugged environments			
Input Power				
Input Voltage Range:	44 to 90VAC @ 50/60Hz			
Input Voltage Waveforms:	Sine, trapezoidal, quasi squarewave			
Input Voltage Turn On:	44 to 45VAC			
Input Loss Hold-up Time:	≥16.7ms			
Power/Ethernet Delivery				
Number of Powered Ethernet Ports:	2			
Connection:	10/100/1000 BASE-T auto sensing/auto-MDIX (8P8C modular jack)			
Bulkhead Interface for Ethernet:	Secure grommet 0.16 to 0.26in (4.0 to 6.6mm) 0.28 to 0.39in (7.0 to 10.0mm)			
Power over Ethernet:	Compliance: IEEE 802.3af/at (PoE/ PoE+) Output Voltage: 52.5VDC ± 0.5VDC Max Current: 600mA per port Max Power Out: 30W per port			
Maximum Total Power Delivery:	60W			
LAN				
Protocols:	Standard TCP/IP protocols			
LAN Services:	DHCP Server, DNS Proxy, HTTP, Webserver			
Ethernet Compliance:	IEEE 802.3af (PoE+)			
L2VPN (BSoD):	Allows creation of L2VPN connection from a cable modem to a northbound ethernet trunked switch port			
Backhaul (WAN)				
Compliance:	CableLabs® certified CMOA-85204 and CMOA-4285 DOCSIS 3.0, 3.1 modems			
CPU:	Single chip Intel Puma 7 CE2753i (industrial grade)			
Automatic Attenuation Adjustment:	<ul style="list-style-type: none"> Independent, transmit and receive digital step attenuators (DSA) 0 to 31.5dB attenuation range in 0.5dB steps Software controlled 			
WAN/LAN Bridging:	802.1d transparent bridging			
Routing:	<ul style="list-style-type: none"> RIPv2 (RFC 2453) over the WAN interface Routing IP over Ethernet to LAN CPEs Static IP addressing on both the WAN and LAN side of the device 			
Duplexer Frequency Range				
DOCSIS® 3.1 Modem	Duplexer Setting 1		Duplexer Setting 2	
	Upstream Range	Downstream Range	Upstream Range	Downstream Range
85204:	5 to 85MHz	108 to 1218MHz	5 to 204MHz	258 to 1218MHz
4285:	5 to 42MHz	108 to 1002MHz	5 to 85MHz	108 to 1002MHz
45204:	5 to 45MHz	258 to 1218MHz	5 to 204MHz	258 to 1218MHz
Mechanical				
Mounting Options:	Strand (vertical and horizontal orientation), pole, wall, vault			
Dimensions H × W × L (in/mm):	3.9 × 8.2 × 14.6 / 98 × 209 × 372			
Weight (lb/kg):	8.45 / 3.83			

CableLabs® and DOCSIS® are registered trademarks of Cable Television Laboratories, Inc.

System Management	
LEDs (Internal):	<ul style="list-style-type: none"> System power DOCSIS (downstream, upstream, online) CPE (link, activity) PoE port status (powered/not powered)
Management Protocols:	SNMPv1, 2c, 3, HTTPs, SSH, TR-069
Remote Output Power Control:	On, off, reset (per port)
Remote PoE Port Status:	Link up/down, link speed, power up/down, PoE device class, PoE power consumption
Remote PoE Device Status:	MAC address, IPv4/IPv6 address
System Management (SNMP):	Standard DOCSIS & Mib2 SNMP MIB support (e.g. sysDescription, sysObjectID, ifTable) CM, other sub-components, GPS, ports and services (when applicable)
Environmental Status Parameters (SNMP):	<ul style="list-style-type: none"> Input voltage, power Output voltage, power, current (per port) Internal temperature Link up/down, link speed, power up/down
Alarming:	SCPE-HMS MIBs and alarming
HTTPS:	HTTPS web interface (diagnostics and device management)
GPS:	GNSS for inventory tracking; < 50ft Accuracy, Proprietary MIBs
CLI:	SSH for diagnostics and device management
TR-069:	TR-181 for LAN/WAN/device management
Advanced Diagnostic Features:	Full spectrum capture (CableLabs MIBs)
Agency and Environment	
Operating Temperature:	-40 to 60°C
Storage Temperature:	-40 to 70°C
Humidity:	5 to 95% non-condensing
Operating Altitude:	-60 to 4,000m (-196 to 13,123 ft)
Enclosure Protection:	UL50E / Type 6 / IEC 60529 IP67 Salt Fog: Tested to ensure functional, operational and mechanical performance with minimal deterioration after subjected to 1000 hour Accelerated Salt Spray Test (ASST) per ASTM B117
Safety:	UL/CSA 60950-1, UL/CSA 60950-22: ED1: NRTL/C Cert (US/CAN), Safety - general requirements
EMC Emissions:	FCC Class B (FCC CFR 47 Part 15 Class B): EMC emissions requirements (US) ICES-003: EMC emissions requirements (Canada) CISPR 32 (IEC/EN 55032): Electromagnetic compatibility of multimedia equipment - Emission requirements (EU/Global)
EMC Immunity:	CISPR 24 (IEC/EN 55024): Information technology equipment, immunity characteristics, limits and methods of measurement, radiated, radio-frequency, electromagnetic field immunity test and immunity to conducted disturbances induced by radio-frequency fields CISPR 35 (IEC/EN 55035): Electromagnetic compatibility of multimedia equipment - Immunity requirements (EU/Global)
Surge Immunity:	IEC 61000-4-5: Surge Immunity: 6kV/3kA on COAX input port, 4kV on ethernet port (1.2×50/8×20) UL/CSA 60950-1: Line Cross: 277VAC on Ethernet ports
RoHS:	RoHS Directive 2011/65/EU Compliant: Restriction of hazardous substances directive



Alpha Technologies Services, Inc. USA: 3767 Alpha Way, Bellingham, WA 98226 Canada: 7700 Riverfront Gate, Burnaby, BC V5J 5M4
Toll Free North America: +1 800 322 5742 Outside US: +1 360 647 2360 Technical Support: +1 800 863 3364
For more information visit www.alpha.com

an EnerSys® company

© 2020 Alpha Technologies Services, Inc. All Rights Reserved. Trademarks and logos are the property of Alpha Technologies Services, Inc., EnerSys and its affiliates unless otherwise noted. Subject to revisions without prior notice. E. & O.E.

09/2020