

Battery Range Summary

The EnerSys® range of PowerSafe® OPzV batteries is suitable for a broad range of applications including telecommunications, power generating stations and distribution systems, railway, airport and seaport signalling, computing, emergency lighting, automation and measuring systems.

The PowerSafe OPzV range of valve regulated lead-acid batteries uses a proven combination of gel and tubular technologies to offer a very high level of reliability. These single cells benefit from an optimised plate design that gives capacities in excess of DIN standard values. In addition, PowerSafe OPzV batteries offer both an excellent float life and a high cycle life for a truly flexible solution.



Features & Benefits

- Proven tubular VRLA gel technology
- Extensive capacity range: 215Ah to 3170Ah
- C₁₀ capacities exceed DIN standard values
- 20 year design life at 68°F/20°C
- Excellent deep discharge recovery and cyclability
- Classic industry-standard design (DIN)
- Superior operational safety with fully insulated connectors, immobilised electrolyte and one way pressure relief valve with an integral flame arrestor
- Flexible installation: vertical or horizontal orientation
- 12 month storage life at 68°F/20°C
- Very low maintenance: no water addition

Construction

- Positive electrode - tubular plate with lead-tin-calcium alloy
- Negative electrode - flat plate with lead-calcium alloy grid
- Separator - low resistance microporous material
- ABS containers and lids with high resistance to shocks and vibrations (UL94 V-0 rated flame retardant ABS available as an option)
- Electrolyte - sulphuric acid, immobilised as a gel
- Proven, high integrity pillar seal design to prevent electrolyte leakage
- Terminal design - M10 terminals with brass insert
- Pressure relief valve - one way valve with integral flame arrestor for increased operational safety

- Connectors – fully insulated, solid copper inter-cell connectors allow voltage measurements (flexible connectors also available)

Installation & Operation

- Recommended float charge voltage: 2.25Vpc (68°F/20°C)
- Permissible operating temperature range: 14°F/-10°C to 113°F/+45°C
- Cells can be installed horizontally to minimize use of floor space
- Optional racking offers easy installation and space saving accommodation
- Long shelf life:
12 months at 68°F/20°C
6 months at 86°F/30°C

Standards


- Tested according to international standard IEC 60896-21 and compliant to defined requirements of IEC 60896-22
- Conforms to DIN 40742 standard (valve regulated OPzV single cells)
- Proof against deep discharge according to DIN 43539 Part 5
- Classified as “Very Long Life” (> 12 years) according to the Eurobat guide
- Batteries must be installed in accordance with IEC 62485-2 and national/local regulations
- The management systems governing the manufacture of PowerSafe® OPzV batteries are ISO 9001, ISO 14001 and ISO 45001 certified

General Specifications

| Cell Type | Nominal Ah Capacity* | Nominal Dimensions | | | | | | Weight - Volumes | | | | | |
|--------------|----------------------|--------------------|-----|-------|-----|--------|-----|------------------|-------|-------|------|------|------|
| | | Length | | Width | | Height | | lbs | | kg | | gal | |
| | | in | mm | in | mm | in | mm | | | | | | |
| 4 OPzV 200 | 215 | 4.1 | 103 | 8.1 | 206 | 15.9 | 403 | 43.0 | 19.5 | 10.1 | 4.6 | 0.9 | 3.4 |
| 5 OPzV 250 | 265 | 4.9 | 124 | 8.1 | 206 | 15.9 | 403 | 51.9 | 23.6 | 12.5 | 5.7 | 1.2 | 4.6 |
| 6 OPzV 300 | 320 | 5.7 | 145 | 8.1 | 206 | 15.9 | 403 | 61.8 | 28.0 | 15.0 | 6.8 | 1.4 | 5.3 |
| 5 OPzV 350 | 385 | 4.9 | 124 | 8.1 | 206 | 20.5 | 520 | 68.4 | 31.0 | 16.5 | 7.5 | 1.6 | 6.1 |
| 6 OPzV 420 | 465 | 5.7 | 145 | 8.1 | 206 | 20.5 | 520 | 80.5 | 36.5 | 20.0 | 9.1 | 1.9 | 7.2 |
| 7 OPzV 490 | 540 | 6.5 | 166 | 8.1 | 206 | 20.5 | 520 | 92.6 | 42.0 | 23.3 | 10.6 | 2.2 | 8.4 |
| 6 OPzV 600 | 705 | 5.7 | 145 | 8.1 | 206 | 27.4 | 695 | 110.3 | 50.0 | 27.5 | 12.5 | 2.6 | 9.9 |
| 8 OPzV 800 | 940 | 8.3 | 210 | 7.5 | 191 | 27.4 | 695 | 150.0 | 68.0 | 36.1 | 16.4 | 3.4 | 12.9 |
| 10 OPzV 1000 | 1170 | 8.3 | 210 | 9.2 | 233 | 27.4 | 695 | 180.8 | 82.0 | 45.1 | 20.5 | 4.2 | 16.0 |
| 12 OPzV 1200 | 1410 | 8.3 | 210 | 10.8 | 275 | 27.4 | 695 | 213.9 | 97.0 | 53.9 | 24.5 | 5.1 | 19.4 |
| 12 OPzV 1500 | 1580 | 8.3 | 210 | 10.8 | 275 | 33.3 | 845 | 264.6 | 120.0 | 67.5 | 30.7 | 6.3 | 23.9 |
| 16 OPzV 2000 | 2110 | 8.3 | 212 | 15.6 | 397 | 32.3 | 820 | 363.8 | 165.0 | 99.7 | 45.3 | 9.3 | 35.3 |
| 20 OPzV 2500 | 2640 | 8.3 | 212 | 19.2 | 487 | 32.3 | 820 | 441.0 | 200.0 | 114.2 | 51.9 | 10.7 | 40.7 |
| 24 OPzV 3000 | 3170 | 8.3 | 212 | 22.7 | 576 | 32.3 | 820 | 529.2 | 240.0 | 141.0 | 64.1 | 13.2 | 50.1 |

Notes: The electrical values shown in the table relate to loadings from a fully charged condition at ambient temperature of 68°F/+20°C. Height shown is overall height, including connectors and shrouds.

Typical Outline Drawings

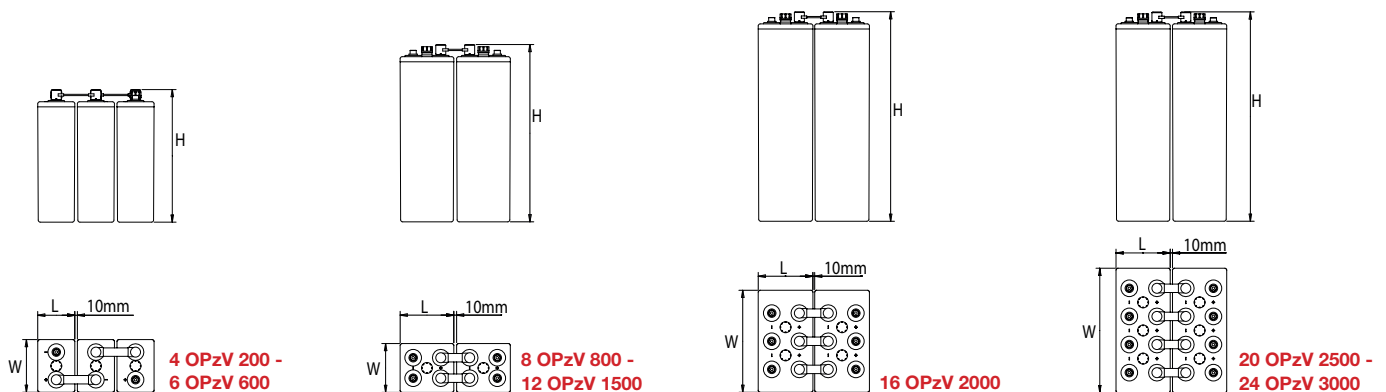

EnerSys World Headquarters
2366 Bernville Road
Reading PA 19605, USA
Tel: +1-610-208-1991 /
+1-800-538-3627

EnerSys EMEA
EH Europe GmbH
Baarerstrasse 18
6300 Zug
Switzerland

EnerSys APAC
152 Beach Road
#11-08 Gateway East Building
Singapore 189721
Tel: +65 6416 4800

Contact: